


De Dietrich

Hood

Ref.: DHT3622X

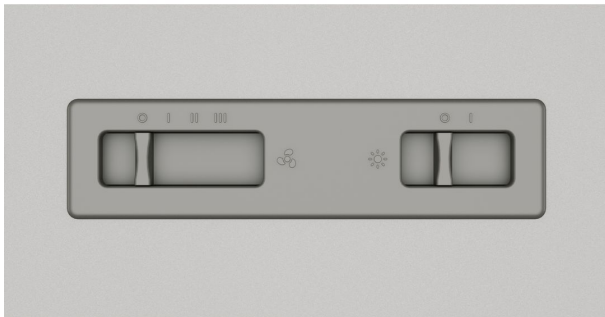

Product highlights

Telescopic hood With its retractable drawer, this hood combines efficiency and discretion.

LED Lighting To ensure low power consumption and a perfect lighting this model is equipped with LED lighting.

Carbon filter The activated carbon filter is delivered with the hood in order to recycle air in an effective manner.

GENERAL

Brand	DE DIETRICH
Commercial code	DHT3622X
EAN code	3660767991965
Customs code	84146000

FEATURES

Product type	Telescopic hood
Design type	Telescopic
Width (cm)	60
Finishing	Body in painted metal
Colour	Stainless steel
Air vented mode	Recycling or extracting air
Delivered in	Recycling air
Type of engine	
Total power of the motors (W)	115
Number of motors	1
Motor location	In hood
Delayed stop	No
LED dimmer	
Fan quantity	1

PERFORMANCE

Annual energy consumption (kWh)	48,5
Energy efficiency class	B
Min extraction rate (m3/h)	255
Max extraction rate (m3/h)	425
Extraction rate with boost (m3/h)	
Min recirculation rate (m3/h)	140
Max recirculation rate (m3/h)	150
Recirculation rate with boost (m3/h)	
Min noise level (dB) (Extraction)	57
Max noise level (dB) (acoustic pressure)	69
Noise level with Boost (dB) (Extraction)	
Min noise level (dB) (recirculation)	67
Max noise level (dB) (recirculation)	68
Noise level with Boost (dB) (recirculation)	
Fluid dynamic efficiency class	C
Light efficiency class	A
Lighting efficiency (Lux)	141
Grease filter efficiency class	C

CONTROLS & LIGHTS

Control type	<FR value not found>
Number of speed positions (without booster)	3
Booster	
Filters saturation indicator	
Type of light	LED
Number of lights	2
Total power of the lamps (W)	5

De Dietrich

Hood

Ref.: DHT3622X

EQUIPMENT	
Type of functions	Independent lighting;On/Off;Speed
Number of grease filters	1
Grease filter material	Aluminium
Accessories supplied	Charcoal filter
Reference of charcoal filter	AFC-36
Reference of recycling kit	
Optional accessories	
Reference of engine	
Reference of the chimney extension	
Air outled diameter (mm)	120
Deflector	No
Non-return valve	Yes

INSTALLATION	
Fuse (A)	0.58
Voltage (V)	220-240
Frequency (Hz)	50-60
Other functions	
Dimensions of the product without chimney HxWxD (mm)	237X564X280
Min-max chimney height (mm)	/
Dimensions of the packed product HxWxD (mm)	264X354X634
Net weight (kg)	7.2
Gross weight (kg)	8.6

MANUFACTURING	
Availability of spare parts (years)	15
Repair index	